

Explorer II

Wireless 5G Gateway Router



Value Proposition

Wireless 5G Gateway Router with fast, secure connectivity on the go and travel-friendly features.

Product Description

The Explorer II is a high-performance 5G/LTE-Advanced Pro wireless gateway router built for RV, Marine, logistics, and industrial use. It supports up to 3.4 Gbps download and Wi-Fi 6 speeds up to 2167 Mbps, enabling smooth streaming and multi-device access. With GNSS tracking, Gigabit Ethernet, and global carrier support, it's a rugged, reliable mobile connectivity solution.

A Mobile Solution for RVs and Yachts

Unlike standard routers, the Explorer II is built for life on the move. It delivers next generation 5G connectivity for RVs, boats, and yachts using independent 2.4GHz and 5.8GHz Wi-Fi 6 radios, 4x4 MIMO antennas, and global 5G/LTE support with dual SIM and eSIM flexibility. It comes equipped with advanced travel-friendly features including Trip Sharing, GNSS-powered Sentry Alarm, USB media streaming, and third-party VPN integration. All functions are easily configured using a mobile app, no external modem or PC required.

Interface

- 1 x SIM Card Slot (Full size, Push-In/Push-Out)
- 1 x USB 3.0
- 1 x Push Button Reset
- 7 x External Antenna Connectors:
 - 2 x SMA for Cellular (50 Ohms, Female)
 - 2 x RP-SMA for 2.4G Wi-Fi (50 Ohms, Male)
 - 2 x RP-SMA for 5.8G Wi-Fi (50 Ohms, Male)
 - 1 x SMA for GPS (50 Ohms, Female) – for CAT6 and CAT 4 models

Wi-Fi Connectivity

- Generation: Wi-Fi 5
- Frequency Bands: Dual-Band; 2.4 GHz and 5.8 GHz
- Radios: Dual for Simultaneous 2.4 GHz and 5.8 GHz operation.
- Operating Modes: Simultaneous Access Point & Client

Standards and Data Rate:

- 2.4 GHz: IEEE 802.11 b/g/n up to 300 Mbps
- 5.8 GHz: IEEE 802.11 a/n/ac up to 867 Mbps

Ethernet

- WAN Port (1 x): 10/100/1000 Mbps, Auto MDI/MDIX
- LAN Ports (3 x): 10/100/1000 Mbps, Auto MDI/MDIX
- Standards: IEEE 802.3, 802.3u, 802.ab

Cellular Connectivity

RTC15924-5-XXXX

- **5G NR – SA/NSA**
 - **Frequency Bands:** n1/n2/n3/n5/n7/n8/n12/n13/n14/n18/n20/n25/n26/n28/n29/n30/n38/n40/n41/n48/n66/n70/n71/n75/n76/n77/n78/n79
 - **SA Sub-6GHz Data Rate:** DL 2.4 Gbps; UL 900 Mbps NSA Sub-6GHz
 - **Data Rate:** DL 3.4 Gbps; UL 550 Mbps
- **4G LTE**
 - **FDD Frequency Bands:** B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29, B30, B32, B66, B71
 - **TDD Frequency Bands:** B38, B39, B40, B41, B42, B43, B48
 - **Data Rate:** DL (Cat 19) 1.6 Gbps, UL (Cat 18) 200 Mbps
- **3G UMTS (Fallback)**
 - **Frequency Bands:** B1, B5, B8
 - **Data Rate:** DC-HSDPA DL 42 Mbps, HSUPA UL 5.76 Mbps
 - **Data Rate:** WCDMA DL 384 Kbps, UL 384 Kbps

RTC15912-C-XXXX

- **4G LTE-A (CAT 12)**
 - **FDD Frequency Bands:** B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B21, B25, B26, B28, B29, B30, B32, B66
 - **TDD Frequency Bands:** B38, B39, B40, B41
 - **Data Rate:** FDD: DL 600 Mbps, UL 150 Mbps – TDD: DL 430 Mbps, UL 90 Mbps
- **3G UMTS (Fallback)**
 - **Frequency Bands:** B1, B2, B3, B4, B5, B8, B9, B19
 - **Data Rate:** DC-HSDPA DL 42 Mbps, HSUPA UL 5.76 Mbps
 - **Data Rate:** WCDMA DL 384 Kbps, UL 384 Kbps

Global Navigation Satellite System (GNSS)

- Simultaneous tracking of multiple constellations.
- GPS: 1575.42 MHz (L1)
- GLONASS: 1597.5 MHz – 1605.8 MHz (L1)
- Galileo: 1575.42 MHz (L1)
- BeiDou: 1561.098 MHz (L1)
- QZSS: 1575.42 MHz (L1)

Power Input

- Voltage: 9 VDC to 32 VDC (12 VDC typical)
- Current: 2.0 A max @ 12 VDC
- Connector: 4-position locking

LED Indicator

- Power
- 2.4 GHz Wi-Fi
- 5.8 GHz Wi-Fi
- 4G (Cell)
- SYS
- USB
- Ethernet Link for each port

Operating Environment


- **Temperature:**
 - Operating: -20°C to 60°C (-4°F to 140°F)
 - Storage: -40°C to 70°C (-40°F to 158°F)
- Humidity: 10% to 90% non-condensing

Physical Dimensions

- Dimension: 164 x 137 x 35 mm (6.5 x 5.4 x 1.4 in)
- Weight: 792 gm (1.74 lb)

Certifications

- Regulatory: FCC, ISCED, CE
- Industry: PTCRB, GCF (CAT 12 only)
- Carriers: T-Mobile, Rogers, Telus, Bell

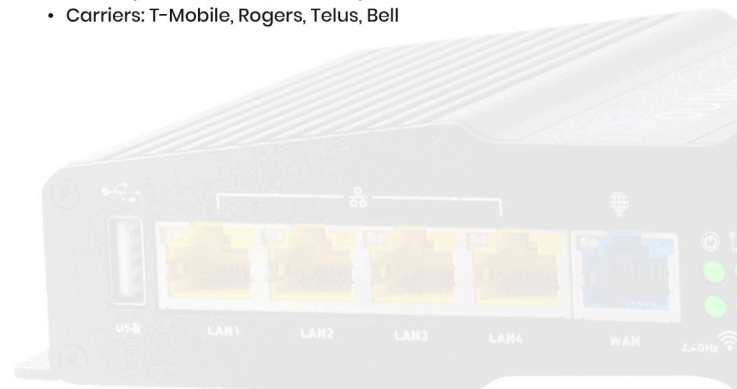

Ordering Information

Product Code	Cellular Standard	Antenna Description
RTC15912-C-0001	LTE-A (CAT 12)	No Antenna
RTC15912-C-1151	LTE-A (CAT 12)	Rod Antenna
RTC15912-C-2221	LTE-A (CAT 12)	P&S Antenna
RTC15912-C-3331	LTE-A (CAT 12)	Rod + P&S Antenna
RTC15912-C-4441	LTE-A (CAT 12)	7-in-1 Antenna

Product Code	Cellular Standard	Antenna Description
RTC15924-5-0001	5G	No Antenna
RTC15924-5-1101	5G	Rod Antenna
RTC15924-5-2201	5G	P&S Antenna
RTC15924-5-3301	5G	Rod + P&S Antenna
RTC15924-5-5501	5G	9-in-1 Antenna

Antenna Options



Antenna Descriptions

Rod Antennas (Indoor)

Omni-directional, high efficiency, adjustable angles for achieving good signal reception indoors.

- Cellular: SMA connectors, Frequency 600 – 2790 MHz
- Wi-Fi: RP-SMA connectors, Frequency 2.4 – 2.5 GHz, 5.15- 5.85 GHz



Peel & Stick Antennas (Indoor)

Low-profile, omni-directional, high efficiency, ideal where the Router location will not allow good signal reception with Rod Antenna. Place on or near windows for better indoor signal reception.

- Cellular: SMA connectors with 2.5 meters coaxial cable, Frequency 600 – 3800 MHz
- Wi-Fi: RP-SMA connectors with 2.5 meters coaxial cable, Frequency 2.4 – 2.5 GHz, 5.15- 5.85 GHz

Husky 9 in 1 Antenna (Outdoor)

IP68-rated, omni-directional, provides best signal reception even in weak signal areas because it avoids signal loss through vehicle windows and signal reflection from objects inside the vehicle. Typically installed on the vehicle roof.


- Cellular: SMA connectors with 2.5 meters coaxial cable, Frequency 600 – 6000 MHz
- Wi-Fi: RP-SMA connectors with 2.5 meters coaxial cable, Frequency 2.4 – 2.5 GHz, 4.9- 7.125 GHz
- GNSS: SMA Connector with 2.5 meters coaxial cable, Frequency 1575 – 1610 MHz -Not used in 5G models.



Routica

Mobile Application

In terms of mobile connectivity, this is a cornerstone. Our Quick-Access App is designed to give RVers the ability to manage tasks with just a touch of their fingers. The configuration of your router's mobile application would be the simplest of tasks. Routica's Mobile Application is mobility personified, as it was designed with the needs of users in mind.

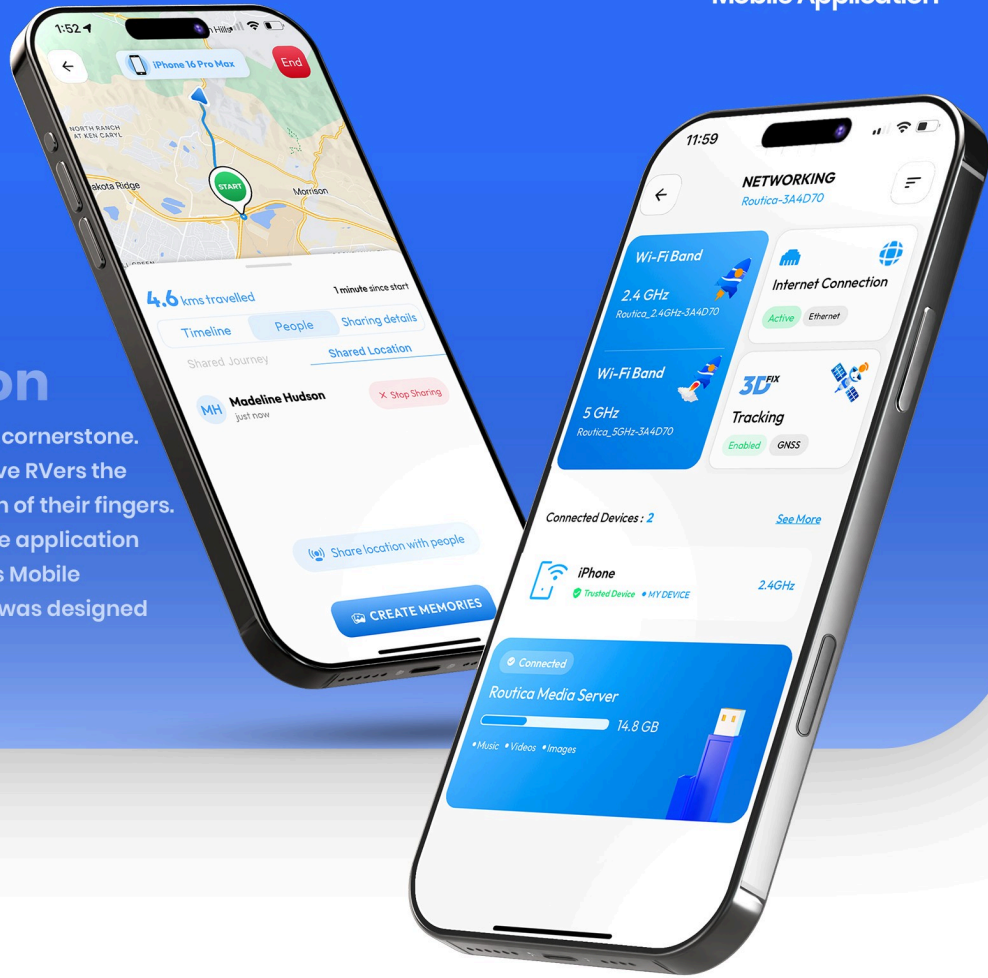

Key Features



Connectivity

With 5G or LTE-Advanced CAT 12 and CAT 16 cellular modems, capable of up to 1.0 Gbps download and 150 Mbps upload speeds.



Wi-Fi as WAN

Dual Wi-Fi radio technology enables your devices to share public Hotspots.



Alarm & Security

Quick Start setup app allows router configuration and setup easily.



Vehicle Location

Built-in GNSS gives you peace of mind about your vehicle. You can also check up on your loved ones from anywhere with an Internet connection.



Share Trips With Friends & Family

Invite your FnF to share your trip in real time together with the photos you take along the way. Your FnF will feel as if they are with you on the trip.



Configuration Via Mobile App

Quick Start setup app allows router configuration and setup easily.

About Us

Routica is a division of Ositech Communications Inc. Located in Canada's technology triangle (Guelph, Ontario), Ositech Communications, Inc. provides wireless data communication solutions for use in Healthcare, EMS, Public Health, Emergency/Rescue, Food Supply Chain Safety and like industries. Ositech is well known in the industry as a developer of "best of class" products for mobile data applications, an achievement due to its continuing investment in R&D.



Contact Us

Specification subject to change without notice
Copyright Ositech Communications 2026

Location

430 Laird Road, Suites 5 – 7
Guelph, Ontario
Canada N1G 3X7

Phone & Fax

Toll Free : 1-(888) 565-8282
Phone : +1 519 836 8063
Fax: +1 519 836 6156

Online

Inquiry : info@routica.com
Help: helpdesk@routica.com
Website : www.routica.com